

Suction filters

SFEX series

Flow rate up to 100 l/min



SFEX GENERAL INFORMATION	page 6
SFEX 060 - 080	8
SFEX 110 - 160	10
SFEX CLOGGING INDICATORS	12
SFEX SPARE PARTS	14

Description

Technical data

Suction filters

Flow rate up to 100 l/min

SFEX are range of suction filters for protection of the downstream pump against the coarse contamination.

They are placed below the minimum oil level, directly connected to the suction line of the pump.

They can be fitted on the side or below the tank, always in-line mounted.

Available features:

- Female threaded connections up to 1 1/4" and SAE connections up to 1 5/8", for a maximum flow rate of 100 l/min
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical, axial and radial vacuum gauges
- MYclean interface connection for the filter element, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

Common application:

- Mobile machines
- Industrial equipment

Filter housing materials

- Head: Aluminium
- Bypass valve: Nylon - Steel
- Bowl: Nylon

Bypass valve

Opening pressure 30 kPa (0.3 bar) \pm 10%

Elements

Fluid flow through the filter element from OUT to IN

Seals

Standard NBR series A

Temperature

From -25 °C to +110 °C

Note

SFEX filters are provided for vertical mounting





Weights [kg] and volumes [dm³]



Filter series	Weights [kg]	Volumes [dm ³]
SFEX 060	0.50	0.60
SFEX 080	0.95	0.80
SFEX 110	1.20	1.60
SFEX 160	1.70	2.00

Hydraulic symbols

Filter series	Style S	Style B
SFEX 060	•	•
SFEX 080	•	•
SFEX 110	•	•
SFEX 160	•	•

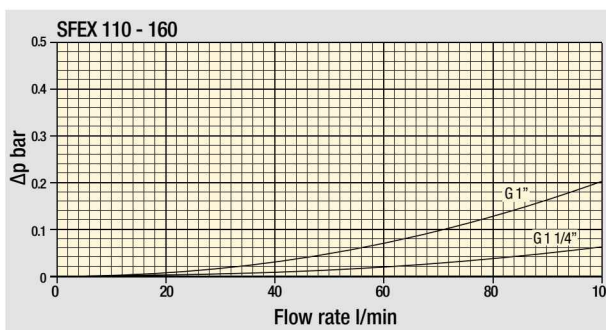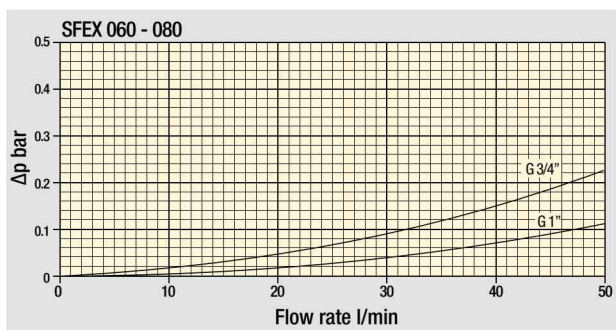

Filter housings
Δp pressure drop

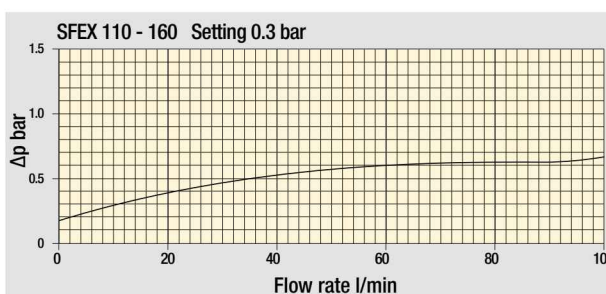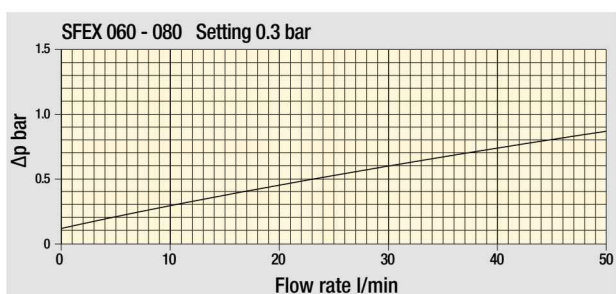

Bypass valve
pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968.
Δp varies proportionally with density.

Flow rates [l/min]

Filter element design - N Series

Filter series	M60	M90	M250	P10	P25
SFEX 060	26	27	27	14	17
SFEX 080	28	29	29	21	23

Connections of filter under test G 3/4".

Filter series	M60	M90	M250	P10	P25
SFEX 060	31	33	33	13	20
SFEX 080	34	35	35	24	30

Connections of filter under test G 1".

Filter series	M60	M90	M250	P10	P25
SFEX 110	93	96	96	48	53
SFEX 160	98	99	99	60	65

Connections of filter under test G 1 1/4".

Maximum flow rate for a complete suction filter with a pressure drop Δp = 0.08 bar.

The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.

SFEX SFEX060 - SFEX080

Designation & Ordering code

COMPLETE FILTER

Configuration example: **SFEX060** **B** **A** **A** **6** **M60** **N** **P01**

Series and size
SFEX060
SFEX080

Bypass valve
S Without bypass
B 0.3 bar

Seals and treatments
A NBR

Connections
A G 3/4"
B G 1"
C 3/4" NPT
D 1" NPT
E SAE 12 - 1 1/16" - 12 UN
F SAE 16 - 1 5/16" - 12 UN

Connection for clogging indicator
6 With plugged connections

Filtration rating (filter media)
M60 Wire mesh 60 µm **P10** Resin impregnated paper 10 µm
M90 Wire mesh 90 µm **P25** Resin impregnated paper 25 µm
M250 Wire mesh 250 µm

Element Δp
N 8 bar

Execution
P01 MP Filtri standard
Pxx Customized

FILTER ELEMENT

Configuration example: **FEX060** **M60** **A** **N** **P01**

Element series and size
FEX060
FEX080

Filtration rating (filter media)
M60 Wire mesh 60 µm **P10** Resin impregnated paper 10 µm
M90 Wire mesh 90 µm **P25** Resin impregnated paper 25 µm
M250 Wire mesh 250 µm

Seals and treatments
A NBR

Element Δp
N 8 bar


Execution
P01 MP Filtri standard
Pxx Customized

ACCESSORIES

Clogging indicators		page			page
VEB	Electrical vacuum indicator	12	VVB	Axial pressure gauge	13
VLB	Electrical/visual vacuum indicator	12	VVS	Radial pressure gauge	13

Filter size	H [mm]	
060	202	
080	265	

Connections	T	R
A	G 1/8"	M6
B	G 1/8"	M6
C	1/8" NPT	1/4" UNC
D	1/8" NPT	1/4" UNC
E	1/8" NPT	1/4" UNC
F	1/8" NPT	1/4" UNC

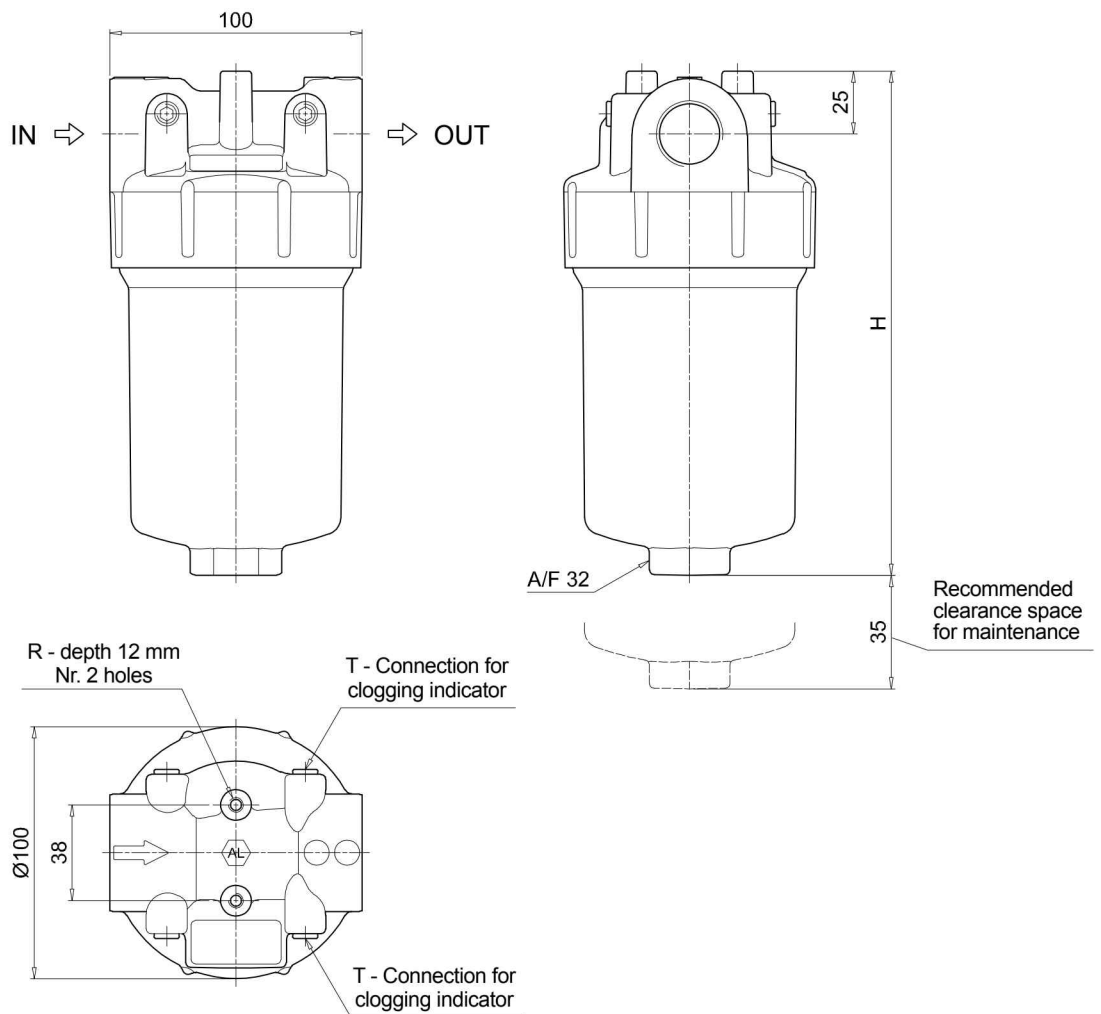

SFEX SFEX110 - SFEX160

Designation & Ordering code

COMPLETE FILTER

Configuration example: **SFEX110** **B** **A** **A** **6** **M60** **N** **P01**

Series and size
SFEX110
SFEX160

Bypass valve
S Without bypass
B 0.3 bar

Seals and treatments
A NBR

Connections
A G 1"
B G 1 1/4"
C 1" NPT
D 1 1/4" NPT
E SAE 16 - 1 5/16" - 12 UN
F SAE 20 - 1 5/8" - 12 UN

Connection for clogging indicator
6 With plugged connections

Filtration rating (filter media)
M60 Wire mesh 60 µm **P10** Resin impregnated paper 10 µm
M90 Wire mesh 90 µm **P25** Resin impregnated paper 25 µm
M250 Wire mesh 250 µm

Element Δp
N 8 bar

Execution
P01 MP Filtri standard
Pxx Customized

FILTER ELEMENT

Configuration example: **FEX110** **M60** **A** **N** **P01**

Element series and size
FEX110
FEX160

Filtration rating (filter media)
M60 Wire mesh 60 µm **P10** Resin impregnated paper 10 µm
M90 Wire mesh 90 µm **P25** Resin impregnated paper 25 µm
M250 Wire mesh 250 µm

Seals and treatments
A NBR

Element Δp
N 8 bar


Execution
P01 MP Filtri standard
Pxx Customized

ACCESSORIES

Clogging indicators		page			page
VEB	Electrical vacuum indicator	12	VVB	Axial pressure gauge	13
VLB	Electrical/visual vacuum indicator	12	VVS	Radial pressure gauge	13

Filter size	H [mm]	
110	266	
160	315	

Connections	T	R
A	G 1/8"	M8
B	G 1/8"	M8
C	1/8" NPT	5/16" UNC
D	1/8" NPT	5/16" UNC
E	1/8" NPT	5/16" UNC
F	1/8" NPT	5/16" UNC

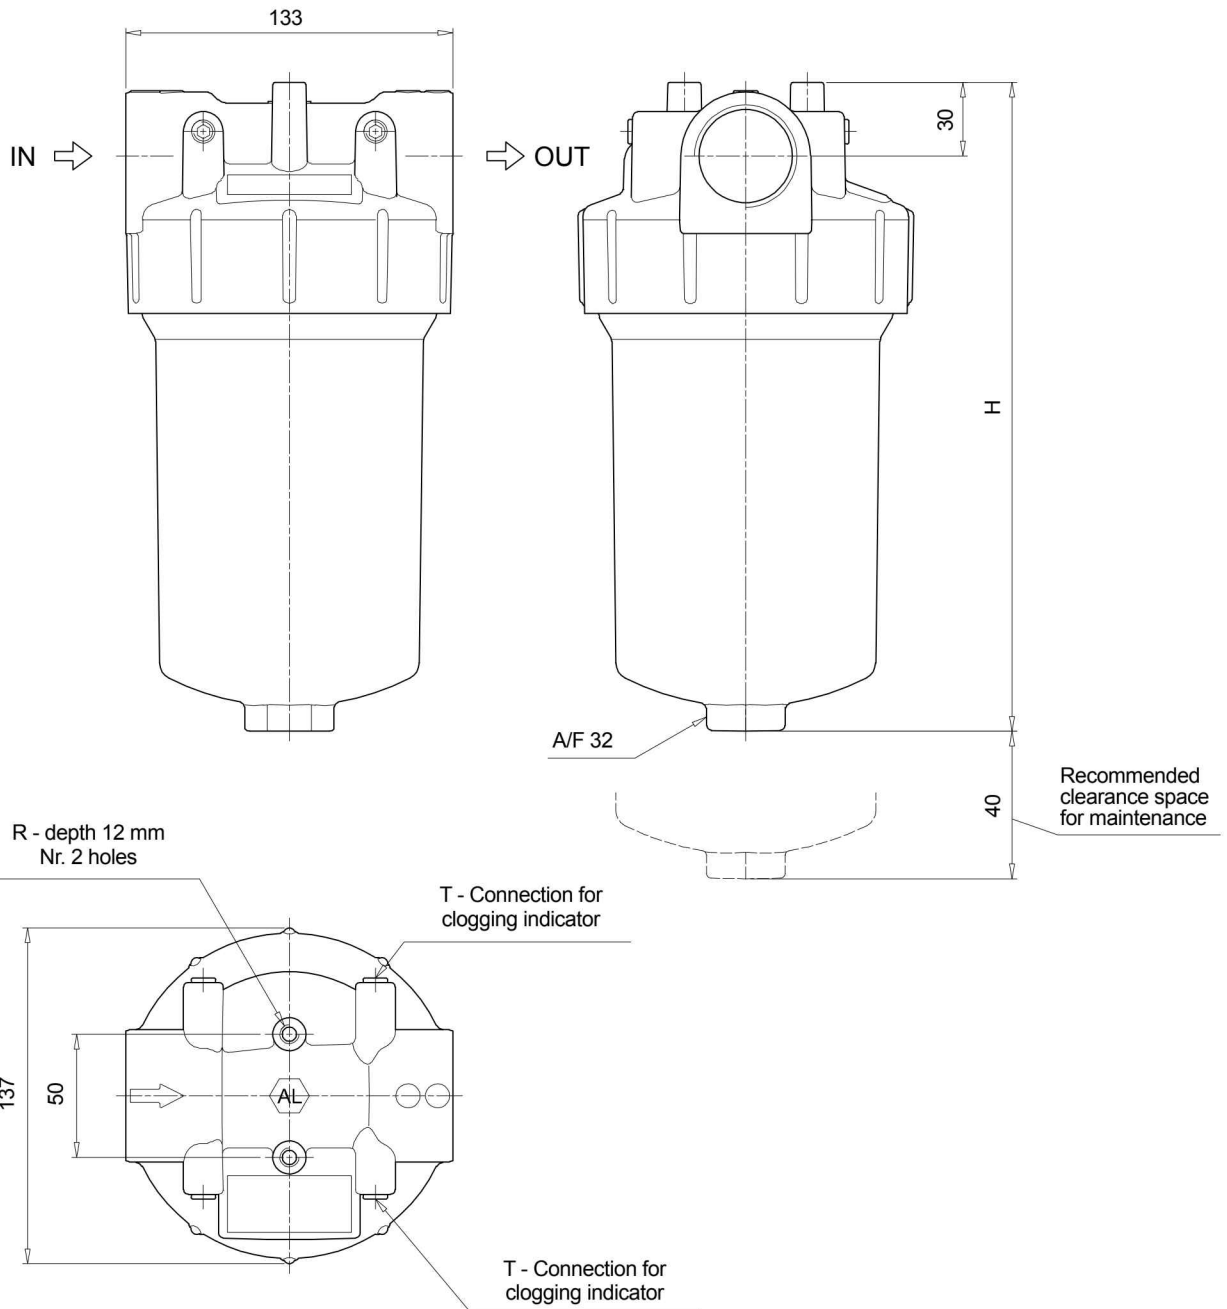
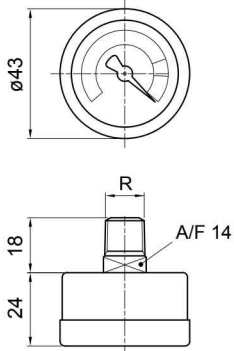
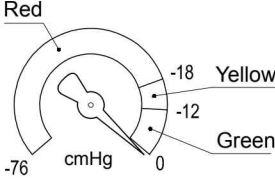



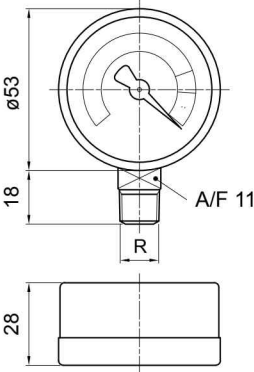
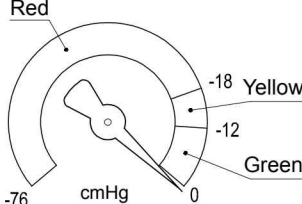
Dimensions

VE*50	
Electrical Vacuum Indicator	
R	Ordering code
EN 10226 - R1/8"	VE B 21 A A 50 P01
<p>Hydraulic symbol</p>	
<p>Electrical symbol</p>	
<p>Materials</p> <ul style="list-style-type: none"> - Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: NBR 	
<p>Technical data</p> <ul style="list-style-type: none"> - Vacuum setting: -0.21 bar ±10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529 	
<p>Electrical data</p> <ul style="list-style-type: none"> - Electrical connection: EN 175301-803 - Resistive load: 5 A / 14 Vdc 4 A / 30 Vdc 5 A / 125 Vac 4 A / 250 Vac - Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X - CE certification 	

VL*51 - VL*52 - VL*53	
Electrical/Visual Vacuum Indicator	
R	Ordering code
EN 10226 - R1/8"	VL B 21 A A xx P01
<p>Hydraulic symbol</p>	
<p>Electrical symbol</p>	
<p>Materials</p> <ul style="list-style-type: none"> - Body: Brass - Base: Transparent Nylon - Contacts: Brass - Nylon - Seal: NBR 	
<p>Technical data</p> <ul style="list-style-type: none"> - Vacuum setting: -0.21 bar ±10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529 	
<p>Electrical data</p> <ul style="list-style-type: none"> - Electrical connection: EN 175301-803 - Type: VL51 VL52 VL53 - Lamps: 24 Vdc 110 Vdc 230 Vac - Resistive load: 1 A / 24 Vdc 1 A / 110 Vdc 1 A / 230 Vac 	

VL*71	
Electrical/Visual Vacuum Indicator	
Connections	Ordering code
EN 10226 - R1/8"	VL B 21 A A 71 P01
<p>Hydraulic symbol</p>	
<p>Electrical symbol</p>	
<p>Materials</p> <ul style="list-style-type: none"> - Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: NBR 	
<p>Technical data</p> <ul style="list-style-type: none"> - Vacuum setting: -0.21 bar ±10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529 	
<p>Electrical data</p> <ul style="list-style-type: none"> - Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc - Resistive load: 0.4 A / 24 Vdc 	

WB		Hydraulic symbol	Materials								
Axial Vacuum Gauge											
R	Ordering code		- Case: Painted Steel - Window: Transparent plastic - Dial: Painted Steel - Pointer: Painted Aluminium - Pressure connection: Brass - Pressure element: Bourdon tube Cu-alloy soft soldered								
EN 10226 - R1/8"	WB B 16 P01										
		Dial scale 	Technical data - Max working pressure: Static: 7 bar Fluctuating: 6 bar Short time: 10 bar - Working temperature: From -40 °C to +60 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Accuracy: Class 2.5 according to EN 13190 - Degree of protection: IP31 according to EN 60529								
		Conversion to SI units <table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table>	[cmHg]	[bar]	-12	-0.16	-18	-0.24	-76	-1.01	
[cmHg]	[bar]										
-12	-0.16										
-18	-0.24										
-76	-1.01										

WS		Hydraulic symbol	Materials								
Radial Vacuum Gauge											
R	Ordering code		- Case: Painted Steel - Window: Transparent plastic - Dial: Painted Steel - Pointer: Painted Aluminium - Pressure connection: Brass - Pressure element: Bourdon tube Cu-alloy soft soldered								
EN 10226 - R1/8"	WS S 16 P01										
		Dial scale 	Technical data - Max working pressure: Static: 7 bar Fluctuating: 6 bar Short time: 10 bar - Working temperature: From -40 °C to +60 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Accuracy: Class 2.5 according to EN 13190 - Degree of protection: IP31 according to EN 60529								
		Conversion to SI units <table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table>	[cmHg]	[bar]	-12	-0.16	-18	-0.24	-76	-1.01	
[cmHg]	[bar]										
-12	-0.16										
-18	-0.24										
-76	-1.01										

Designation & Ordering code

VACUUM INDICATORS							
Series	Configuration example 1: VE B 21 A A 50 P01						
VE Electrical vacuum indicator	Configuration example 2: VL B 21 A A 71 P01						
VL Electrical/Visual vacuum indicator	Configuration example 3: VV S 16 P01						
VV Vacuum gauge							
Type VE - VL	Type VV						
B Connection EN 10226 - R1/8"	B Axial connection EN 10226 - R1/8"						
	S Radial connection EN 10226 - R1/8"						
Vacuum setting	VE	VL	VV				
16 0.16 bar			•				
21 0.21 bar	•	•					
Seals	VE	VL	VV				
A NBR	•	•					
Thermostat	VE	VL	VV				
A Without	•	•					
Electrical connections	VE	VL	VV				
50 Connection EN 175301-803	•						
51 Connection EN 175301-803, transparent base with lamps 24 Vdc		•					
52 Connection EN 175301-803, transparent base with lamps 110 Vdc		•					
53 Connection EN 175301-803, transparent base with lamps 230 Vdc		•					
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc		•					
				Option			
				P01 MP Filtri standard			
				Pxx Customized			